


“HH” EZ-RACK ASSEMBLY

- (1) THREAD FLANGE NUT “B” TO TOP OF RAIL “A” 4 PLACES
- (2) INTERLOCK RAILS AND PUT THROUGH HOLES IN BASE “C”
- (3) TIGHTEN LARGE WING NUTS “D” TO RAIL “A” SECURING RAILS TO BASE “C”

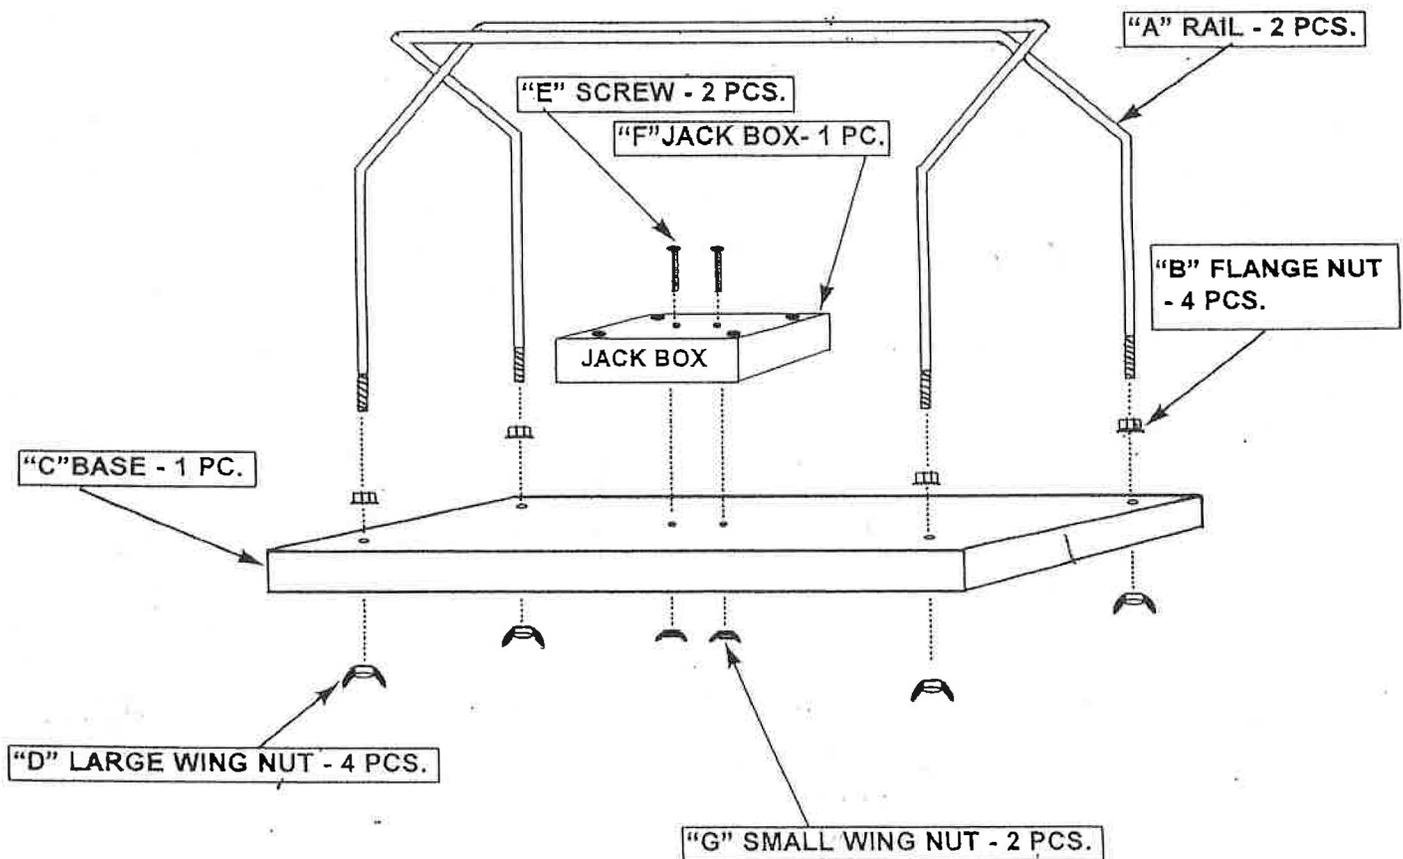

OPTIONAL JACK BOX TO BASE ASSEMBLY

- (1) PLACE SCREWS “E” THROUGH TWO CENTER HOLES IN JACK BOX “F”.
- (2) INSERT “E” SCREWS WHILE IN JACK BOX THROUGH HOLES IN “C” BASE.
- (3) TIGHTEN SMALL WING NUTS “G” TO “E” SCREWS TO SECURE JACK BOX TO “C” BASE